

SPINDLE WASHERS For Hubs

Part Number	Description	Finish	Type	A O.D.	B I.D.	C Width	Our Sequence Number	Per Each
TYPE 3								
SW-625	AG Spindle Washer	Plain	3	1.312	.668	.095	188752	\$0.68
SW-750	AG Spindle Washer	Plain	3	1.750	.820	.187	188754	3.36
SW-751	AG Spindle Washer	Plain	3	1.500	.795	.125	188756	1.15
SW-875	AG Spindle Washer	Plain	3	2.000	.950	.164	188758	4.09
SW-1001	AG Spindle Washer	Plain	3	2.140	1.070	.250	188762	2.47

Qty. Disc: 2 pkgs 2%, 5 pkgs. 5%, 10 pkgs 10%

Date: 2000



COMPLETE WHEEL BEARING & SEAL KITS
Most with grease cap




Kit Number	Use For Hub Number	Our Sequence Number	Per Each	Kit Number	Use For Hub Number	Our Sequence Number	Per Each	Kit Number	Use For Hub Number	Our Sequence Number	Per Each
Q181BK	505-3181	EE0011	\$45.75	Q729BK*	Q729	EE0047	\$42.75	Q871BK*	51010871	EE0102	\$193.70
Q181BK	50503181	EE0011	45.75	Q733BK*	Q733	EE0052	37.10	Q881BK*	Q881	EE0107	225.25
Q192BK	506-3192	EE0013	53.79	Q736BK	Q736	EE0057	38.71	Q888BK	Q888	EE0112	43.30
Q192BK	50603192	EE0013	53.79	Q736BK	50510736	EE0057	38.71	Q888BK	50610888	EE0112	43.30
Q502BK*	Q502	EE0007	67.85	Q777BK	Q777	EE0062	53.49	Q888BK	50611888	EE0112	43.30
Q626BK	504-0626	EE0016	15.23	Q777BK	50610777	EE0062	53.49	Q888BK	50612889	EE0112	43.30
Q633BK	Q633	EE0012	39.27	Q778BK	Q778	EE0067	76.16	Q888BK	50613889	EE0112	43.30
Q633BK	504-0633	EE0012	39.27	Q778BK	50800778	EE0067	76.16	25-5LMBK	25-5LM	EE0117	43.88
Q657BK*	Q657	EE0017	37.10	Q783BK	Q783	EE0072	52.48	25-66LMBK	25-66LM	EE0122	43.88
Q669BK	Q669	EE0022	32.77	Q803BK	Q803	EE0077	76.16	30-66LMBK	30-66LM	EE0127	53.07
Q669BK	504-0669	EE0022	32.77	Q803BK	50610803	EE0077	76.16	35-6LMBK	35-6LM	EE0132	49.98
Q670BK	Q670	EE0027	91.06	Q813BK*	Q813	EE0082	73.01	45-8LMBK	45-8LM	EE0137	57.57
Q701BK*	Q701	EE0032	39.19	Q819BBK	Q819B	EE0087	104.84	60-8LMBK	60-8LM	EE0142	86.62
Q709ABK	Q709A	EE0037	44.61	Q821BK	Q821	EE0092	95.21	80-8LMBK	80-8LM	EE0147	86.62
Q709ABK	50610709	EE0037	44.61	Q826BK	Q826	EE0097	39.27	90-8BMBK	90-8BMB	EE0148	160.39
Q719BK	Q719	EE0042	38.97	Q826BK	50610826	EE0097	39.27	90-8BMBK	50800900	EE0148	160.39
Q719BK	50510719	EE0042	38.97	Q871BK*	Q871	EE0102	193.70				


* Without Grease Cap

Wheel Bearing KIT Number	Wagon Number	Hub Number	Inner Cone	Outer Cone	Inner Cup	Outer Cup	Oil Seal	Grease Cap	Bolt	Bolt Pattern	Wt. Cap. Per Hub
EW10	5016	Q709G	LM48548	LM67048	LM48510	LM67010	15190	1513	90D0613945	6 on 6	2760
EW10	5026	Q709G	LM48548	LM67048	LM48510	LM67010	15190	1513	90D0613945	6 on 6	2760
EW10	5026A	Q709G	LM48548	LM67048	LM48510	LM67010	15190	1513	90D0613945	6 on 6	2760
EW10	5026B	Q709G	LM48548	LM67048	LM48510	LM67010	15190	1513	90D0613945	6 on 6	2760
EW10	5026C	Q709G	LM48548	LM67048	LM48510	LM67010	15190	1513	90D0613945	6 on 6	2760
EW15	5010A	Q778	25590	25877	25520	25821	20148	1607	90D0608723	8 on 8	5050
EW15	5010B	Q778	25590	25877	25520	25821	20148	1607	90D0608723	8 on 8	5050
EW20	5023	Q633	LM67048	LM11949	LM67010	LM11910	14975	1527	90D0608449	4 on 5	1500
EW20	5030	Q633	LM67048	LM11949	LM67010	LM11910	14975	1527	90D0608449	4 on 5	1500
EW30	5026E	Q888	JL69349	LM67048	JL69310	LM67010	16284	1513	90D0613945	6 on 6	3500
EW35	5026D	Q777	LM29749	LM67048	LM29710	LM67010	16284	1513	90D0613945	6 on 6	3560
EW40	6020	Q783	LM501349	LM67048	LM501310	LM67010	18823	1513	90D0613945	6 on 6	4570
EW45	795	Q670	342A	14137A	332	14276	22870	1526	90D0613945	6 on 6	3230
EW45	660	Q670	342A	14137A	332	14276	22870	1526	90D0613945	6 on 6	3230
EW45	760	Q670	342A	14137A	332	14276	22870	1526	90D0613945	6 on 6	3230


POSITIVE OFFSET



HOW TO MEASURE BOLT CIRCLES



NEGATIVE OFFSET



POSITIVE OFFSET (Inset):
Offset is the distance between the mounting face of the disc and the rim centerline. This distance is termed positive when the mounting face is outboard of the rim centerline.

4-LUG
6-LUG
8-LUG
Middle of two holes directly across from one another.

5-LUG
Back of a hole to the center of the second hole.

BACK SPACING:
Inside of wheel mounting face to outside of hub mounting face.


NEGATIVE OFFSET (Outset):
Offset is the distance between the mounting face of the disc and the rim centerline. This distance is termed negative when the mounting face is inboard of the rim centerline.

Bolt Circle (Pattern): The diameter of an imaginary circle drawn through the center of each lug hole or stud.

Wheel Part Number	Our Sequence Number	Per Each	Size	Capacity	Offset	Back Spacing	Thickness Disc	Thickness Rim	Valve Hole Diam.	Location	Can Use With Hub Number
4 BOLT ON 5" BOLT CIRCLE, 3-5/8 PILOT PATTERN											
W154-45362	188312	\$70.91	15x4-1/2	1,250	-3/8 Out	2.25	.140	.120	.625	Outset	Q669, Q633
5 BOLT ON 5-1/2" BOLT CIRCLE, 4" PILOT, WITH LIP PATTERN											
W156-5554	188326	81.46	15x6	2,200	-1/4 Out	2.50	.190	.125	.625	Outset	Q736, Q719, 25-5LM, Q885/Q729
W158-5554	188316	107.31	15x8	3,200	-1/4 Out	4.25	.218	.155	.625	Outset	Q736, 25-5LM, Q719, Q885/Q729
6 BOLT ON 6" BOLT CIRCLE, 4-5/8" PILOT PATTERN											
W156-66462	188330	97.61	15x6	3,300	+1-1/8 In	4.62	--	--	.625	Inset	Q826, Q709A
W158-66462	188318	100.54	15x8	3,800	+1-1/8 In	5.62	.218	.156	.625	Inset	Q777, 35-6LM
W165825-66462	188319	133.49	16.5x8.25	4,000	+3/8 In	5.75	.218	.165	.625	Inset	Q783, Q803, Q888

Brkn. Pkg. Date: Varies


FINE CONICAL HEAD WHEEL STUD SCREWS



Part Number	Diam. Inches	A Overall Length Inches	B Thread Length Inches	C Head Angle Degrees	D Hex Diam. Inches	Our Sequence Number	Per Each
GRADE 5							
90DLB509*	1/2 x	1-3/8	7/8	90°	13/16	188734	\$1.78
90D0608449	1/2 x	1-1/2	1	90°	3/4	190362	1.10
90D0613945	1/2 x	1-3/4	1	90°	3/4	589825	3.11
90D0617820	1/2 x	2-1/4	1-1/2	90°	3/4	589817	3.02
90DWD91071	1/2 x	2-5/16	1-3/4	90°	3/4	337830	4.57
90DLB569*	9/16 x	1-5/8	1-1/8	90°	7/8	188732	1.97
90D0608723	9/16 x	1-3/4	1-1/8	90°	7/8	589835	3.31
90D0616460	9/16 x	2-1/4	1-5/8	90°	7/8	589840	4.04
90D0617925	9/16 x	2-3/4	2	90°	7/8	589813	2.88
90DWD9275	5/8 x	2-3/8	1-3/4	90°	15/16	337835	4.57
90DWD9731	5/8 x	3-5/8	3	90°	15/16	337840	5.82
GRADE 8							
90D0610838	5/8 x	2-1/4	1-1/2	90°	15/16	589805	4.57
90D0618025	5/8 x	2-3/4	1-7/8	90°	15/16	589807	4.01
90D0616275	3/4 x	3	1-7/8	90°	1-1/4	589860	6.58

NOTE: DWD Used with some dual wheels
*90DLB509 & 90DLB569 Phosphate Oil Treated, All Others are Plated

FINE CONICAL NUTS TO FIT FINE SPLINED FLAT HEAD WHEEL STUD SCREWS



Part Number	Thread Size	A	B	C	Our Sequence Number	Per Each
0611878	1/2-20	13/16	5/8	90	188751	\$1.19
STN-569	9/16-18	1	11/16	90	1887512	2.74
0616471	5/8-18	15/16	23/32	90	589862	1.12
912935	3/4-16	1-1/2	7/8	100	589866	4.69

COARSE CONICAL NUTS TO FIT CASE DUALS

9478DWD	3/4-10	1-1/4	1	90	337850	12.46
---------	--------	-------	---	----	--------	-------

NOTE: DWD Used with some dual wheels

CALL FOR QUANTITY DISCOUNTS


FINE SPLINED FLAT HEAD WHEEL STUD SCREWS



Part Number	Diam. Inches	A Overall Length Inches	B Thread Length Inches	C Spine Diam. Inches	Sequence Number	Our Per Each
GRADE 5						
0613717	1/2 x	2-1/16	1-1/2	.612	190366	\$1.17
ST-502-04	1/2 x	2	1-3/8	.543	188744	2.06
ST-504 *	1/2 x	2-1/4	1-3/8	.606	188746	1.97
ST-562	9/16 x	2-1/8	1-3/8	.606	188750	2.77
0612730	9/16 x	2-1/8	1-3/8	.617	190364	3.12
ST-625	5/8 x	2-1/2	1-3/8	.682	188748	3.19
953033 *	3/4 x	2-13/16	1-13/16	1.00	589889	8.48
91036DWD +	7/8 x	3-9/16	2-3/4	1.00	337845	15.37

*ST-504 and 953033 are Grade 8 + Coarse Thread

FLANGE NUTS GRADE 5



FLANGE NUT

Part Number	Thd. Size	A	B	C	Our Sequence Number	Per Each
0617512	3/4-16	1-1/8	21/32	1-1/2	589868	\$2.45

FINE CONICAL HEAD WHEEL STUD SCREW



Part Number	Diam. Inches	A Overall Length Inches	B Thread Length Inches	C Head Angle Degrees	D Hex Diam. Inches	Our Sequence Number	Per Each
LB-506	1/2	1-1/2	7/8	60	13/16	189290	\$0.88

**HUBS MAY BE STOCKED
WITH OR WITHOUT
GREASE FITTINGS**
To Order Hubs with Grease Fittings
Add G on the end of the Part Number



Hub Groups Include All Necessary Components For Hub and Spindle-Shipped In Bulk
Wheels For Farm Implements Must Be Ordered Separately

Hub Group Number	Our Sequence Number	Per Each	Capacity Pounds	Spindle	Inner Bearing Cone No.	Inner* Bearing Cup No.	Outer Bearing Cone No.	Outer* Bearing Cup No.	Oil Seal Number	Grease Cap Number	Bolt or Nut Number
4 BOLT ON 5" BOLT CIRCLE, 3-5/8" PILOT											
Q669	189405	\$81.39	1,250	0204664	LM67048	LM67010	LM11949	LM11910	14975	1524	90D0613945
Q633	Y90352	81.40	1,500	0205194	LM67048	LM67010	LM11949	LM11910	14975	1527	90D0608449
5 BOLT ON 5-1/2" BOLT CIRCLE, 4" PILOT											
Q736	Y90320	103.61	1,650	0205194	LM67048	LM67010	LM11949	LM11910	14975	1524	0611878
Q719	Y90318	113.96	2,760	0203661	LM48548	LM48510	LM67048	LM67010	15190	1513	0611878
25-5LM	188530	114.08	2,500	105708K	LM48548	LM48510	LM67048	LM67010	17617	1604	0611878
6 BOLT ON 6" BOLT CIRCLE, 4-5/8" PILOT											
Q826	Y90374	129.44	1,650	0205194	LM67048	LM67010	LM11949	LM11910	14975	1527	90D0613945
Q670	Y90317	180.16	3,230	0203161	342A	332	14137A	14276	22870	1526	90D0613945
Q709G	189409	125.05	2,760	0203661	LM48548	LM48510	LM67048	LM67010	15190	1513	90D0613945
Q888	188538	119.02	3,500	03178551	JL69349	JL69310	LM67048	LM67010	16284	1513	90D0613945
Q777G	Y90321	125.25	3,500	0205470	LM29749	LM29710	LM67048	LM67010	16289	1513	90D0613945
Q783G	189406	140.53	4,570	03155411	LM501349	LM501310	LM67048	LM67010	18823	1513	90D0613945
Q803	Y90324	182.71	4,910	0205172	25590	25520	25877	25821	20148	1607	90D0608723
25-66LM	189400	125.16	2,500	105708K	LM48548	LM48510	LM67048	LM67010	17617	1604	0611878
30-66LM	Y90332	106.61	3,000	106753A	LM29749	LM29710	LM67048	LM67010	17617	1604	LB-506
35-6LMG	189402	140.55	3,500	106169A	LM501349	LM501310	LM67048	LM67010	20044	1604	90D0608723
8 BOLT ON 8" BOLT CIRCLE, 6" PILOT											
Q778G	Y90366	206.21	4,910	0205172	25590	25520	25877	25821	20148	1607	90D0608723
Q821G	Y90372	292.40	5,790	0205574	3780	3720	2790	2720	25091	1607	90D0616460
Q848	Y903265	571.18	8,000	0317846	39581	39520	3585	3525	35062	9301	90D0608723
45-8LMG	189408	226.66	4,500	106272B	LM603049	LM603011	LM67048	LM67010	22392	1604	90D0608723
60-8LMG	188547	236.56	6,000	107007A	JLM506849	JLM506810	LM501349	LM501310	27394	1609	0616471
80-8LM	Y90394	415.45	8,000	281316	JLM506849	JLM506810	LM501349	LM501310	27394	1609	90D0610838
10 BOLT ON 13-3/16" CIRCLE, 11.05" PILOT											
*Q881	590024	588.35	20,000	2819000L	HM218248	HM218210	HM212049	HM212011	43771	502015	0617512

*Less Spindle

NOTE: Inner and Outer Bearing Cup Pressed into ALL Hubs.

Qty. Disc: 5 pkgs. 10%; 10 pkgs. 20%

OIL SEALS FOR ELECTRIC WHEEL HUBS




Chicago Rawhide Part No.	Electric Wheel Part No.	Baum Seal Part No.	For Hub Number	Shaft Diam. Inches	Outside Diam. Inches	Seal Width Inches
		22558	QD82-13	2.25	3.375	.313
14283		300608	505-3181, 5050381	1.438	2.374	.313
14974		300558	504-0669, 5040633			
			50610826, 50610777	1.500	2.328	.500
14972			H13-450	1.500	2.328	.500
14975	0202782		Q633, Q736, Q626	1.500	2.332	.390
15174	0206228	See Note	Q859 For Oil Seals	See Oil Seal Pages		
15190	0203549	300574	50610709, 50510719			
			Q719, Q709A, Q701			
			Q885/Q729	1.500	2.623	.250
15960		30066	506-3192, 50603192	1.594	2.502	.313
16284	0205275		Q777, Q798, Q888	1.162	2.562	.250
16289		300582	50610888, 50611881, 50612889, 50613889, Q777	1.628	2.562	.438
17617	0202130		Q502, 25-5LM	1.750	2.772	.359
18823			25-66LM, 30-66LM			
			Q783	1.875	3.005	.250
20044			35-6LM	2.000	3.061	.250
20148	0205426	300590	50610803, 50800778, Q778, 1803	2.000	3.628	.250
22870	0201180		Q563, Q670	2.297	3.153	.359
22392			45-8LM, 80-8LM	2.250	3.061	.250
25091	0204998		Q735, Q821, Q819B	2.500	3.756	.438
27394			60-8LM	2.750	3.756	.250
28848		300749	50800900, 908BMB	2.875	4.506	.438
29951			Q886	3.000	4.008	.438
30087			Q871	3.000	4.505	.438
30095		300632	51010781, 130-10BM	3.000	4.505	.438
35062			Q848	3.500	4.847	.898
40108		300547	510101900, 190-10BM	4.000	5.751	.438
43771			Q881	4.375	6.000	.500

GREASE CAPS

Date: 2000

A-Flange Diam. (O.D.)
B-Crown Height
C-Flange Length
D-Overall Height




Package of 4

Part Number	Material Thickness	A Flange Diam.	B Crown Height	C Flange Length	D Overall Height	Our Sequence Number	Per Each
1503	.032	1.785	1.16	.375	1.53	876030	\$1.75
1524	.032	1.943	1.10	.281	1.38	876085	1.94
1527	.037	1.957	1.04	.340	1.38	876095	2.61
9099	.063	1.969	.625	.438	1.062	589956	3.90
1505	.032	1.986	.78	.375	1.16	876040	2.71
1518	.032	1.986	.94	.250	1.16	876068	1.69
1601	.059	2.331	.81	.440	1.25	876120	2.74
1513	.074	2.448	.93	.312	1.24	876060	2.65
1520	.032	2.448	1.03	.312	1.34	876070	1.94
1604	.059	2.448	.88	.281	1.16	876130	3.59
1606	.059	2.503	.56	.312	.94	876140	2.65
1605	.059	2.717	1.03	.312	1.34	876135	4.16
1526	.037	2.720	1.13	.312	1.44	876090	2.46
1609	.059	3.125	1.03	.281	1.31	876148	5.45
1607	.059	3.155	1.19	.187	1.38	876145	3.78
1528	.037	3.355	1.06	.560	1.62	876100	4.92
9301	.070	3.950	2.13	.310	2.44	589951	16.78

Qty. Disc: 5 pkg. 5%; 10 pkgs. 10%; 25 pkgs. 15%; 50 pkgs. 20%

**HUBS FOR FARM IMPLEMENT WHEELS
WITH AND WITHOUT GREASE FITTINGS**
With Inner & Outer Cups Pressed Into Place

For Hubs with Grease Fittings Please Add w/Zerk Suffix to Hub Number

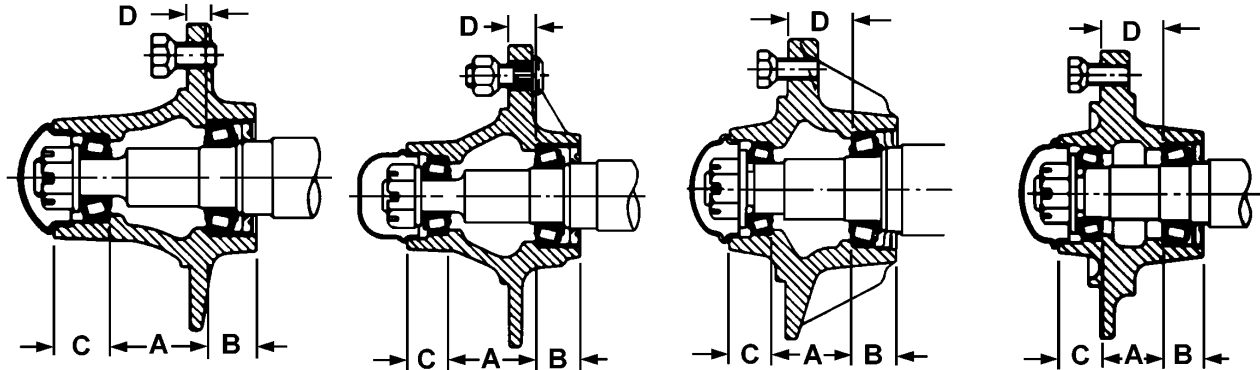


Q669, Q633
H13-450

Q736, Q719
25-5LM

Q826, Q670,
Q783, Q803,
35-6LM

Q709A, Q777, Q888
25-66LM, 45-8LM

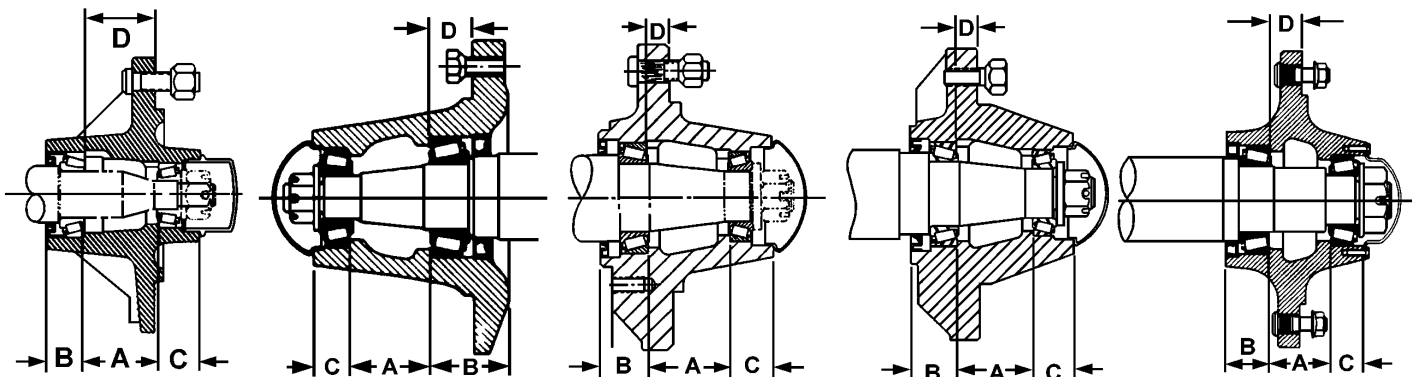

30-66LM

Q821, Q778
Q848

60-8LM

80-8LM

Q881

New Hub Casting Number	Fits Spindle Number	Capacity Lbs.	Our Sequence Number	Each Hub	Inner Bearing Cone Number	Outer Bearing Cone Number	Oil Seal Number	Grease Cap Number	Wheel Bolt Number	A	B	C	D
------------------------	---------------------	---------------	---------------------	----------	---------------------------	---------------------------	-----------------	-------------------	-------------------	---	---	---	---

BEST SELLING HUBS STOCKED IN QUANTITY

4 BOLT ON 5" BOLT CIRCLE, 3-5/8" PILOT

Q669	0204664	1,250	189410	\$23.86	LM67048	LM11949	14975	1524	90D0613945	1.16	.94	.88	.38
Q633G	0205194	1,500	189411	35.16	LM67048	LM11949	14975	1527	90D0608449	2.00	1.00	1.12	.38

5 BOLT ON 5-1/2" BOLT CIRCLE, 4" PILOT, WITH LIP

Q736	0205194	1,650	589982	60.71	LM67048	LM11949	14975	1524	0611878	2.00	1.00	.94	.62
25-5LM+	105708K	2,500	188406	52.59	LM48548	LM67048	17617	1604	0611878	1.56	1.03	.94	.19
Q719	0203661	2,760	589986	66.48	LM48548	LM67048	15190	1513	0611878	1.56	1.00	1.06	.22
Q885/Q729	0615537	2,900		Obsolete	LM48548	L44649	15190	9099	90D0608723	1.50	1.06	1.13	.22

6 BOLT ON 6" BOLT CIRCLE, 4-5/8" PILOT

Q826	0205194	1,650	589994	80.73	LM67048	LM11949	14975	1527	90D0613945	2.00	1.00	1.12	1.88
25-66LMG	105708K	2,500	189412	44.64	LM48548	LM67048	17617	1604	0611878	1.56	1.03	.94	1.44
Q709G	0203661	2,760	189421	39.22	LM48548	LM67048	15190	1513	90D0613945	1.56	1.00	1.06	1.59
30-66LM	106753A	3,000	189414	49.60	LM29749	LM67048	17617	1604	LB-506	2.19	1.00	.94	1.94
Q670	0203161	3,230	589998	77.41	342A	14137A	22870	1526	90D0613945	1.62	1.13	1.75	1.81
Q777 w/zerk	0205470	3,500	188350	59.03	LM29749	LM67048	16289	1513	90D0613945	1.56	1.00	1.06	1.50
35-6LMG+	106169A	3,500	189416	52.23	LM501349	LM67048	20044	1604	90D0608723	2.84	1.44	.97	1.56
Q888	03178551	3,500	188453	44.17	JL69349	LM67048	16284	1513	90D0613945	1.53	1.09	1.03	1.53
Q783G	03155411	4,570	189418	56.75	LM501349	LM67048	18823	1513	90D0613945	2.00	1.13	1.06	1.62
Q803	0205172	4,910	590002	88.64	25590	25877	20148	1607	90D0608723	2.50	1.38	1.13	1.75

8 BOLT ON 8" BOLT CIRCLE, 6" PILOT

45-8LMG	106272B	4,500	189420	96.06	LM603049	LM67048	23392	1604	90D0608723	2.83	1.26	.94	1.38
Q778 w/zerk	0205172	4,910	188354	109.28	25590	25877	20148	1607	90D0608723	2.50	1.75	1.12	.88
Q821	0205574	5,790	188360	102.71	3780	2790	25091	1607	90D0616460	2.44	2.41	1.25	1.34
60-8LM+	107007A	6,000	188496	116.95	JLM506849	LM501349	27394	1609	0616471	2.56	1.50	1.44	.75
80-8LM+	281316	8,000	590016	241.77	JLM506849	LM501349	27394	1609	90D0610838	2.72	1.50	1.37	.83
Q848	0317846	8,000	590012	295.12	39581	3585	35062	9301	90D0608723	3.22	1.28	1.40	1.84

10 BOLT ON 13-3/16" CIRCLE, 11.05" PILOT

Q881	04190441	20,000	590024	588.35	HM218248	HM212049	43771	502015	0617512	3.25	2.28	1.72	1.66
------	----------	--------	--------	--------	----------	----------	-------	--------	---------	------	------	------	------


+ French & Hecht Style.

B=Machined for brake drum.

Call for Quantity Discounts

**AGRICULTURAL STRAIGHT ROUND SPINDLES
FOR FARM IMPLEMENTS
FOR 20 MPH SPEED**

MADE OF ROUND HOT ROLLED STEEL READY TO BE WELDED INTO TUBING
INTERCHANGE WITH ELECTRIC WHEEL and FRENCH & HECHT

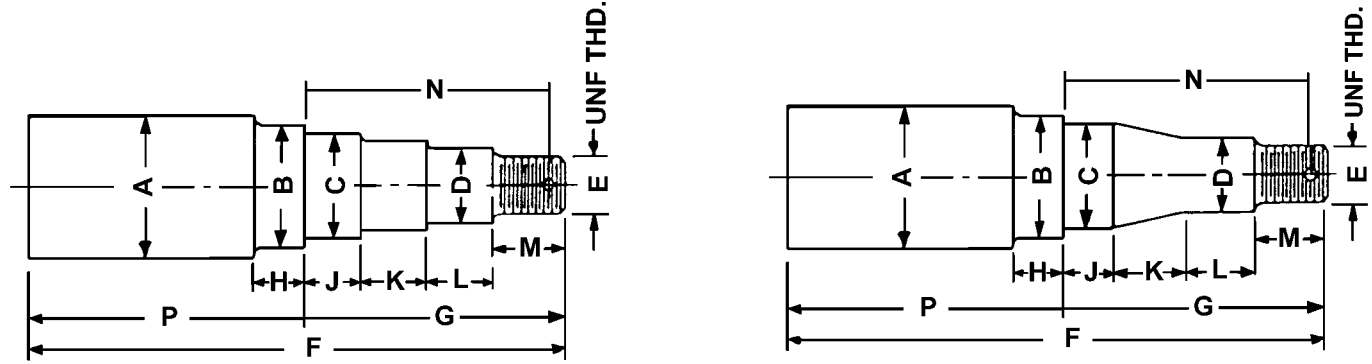

Spindle Number	Capacity Spindle Lbs.	Fits Hub	Our Sequence Number	Per Each	A Bar Stock Size	F Overall Length	G Length	B Seal Seat Diam.	C Inner Bearing Diam.	D Outer Bearing Diam.	M Thread Length	E Thread Diam.
0205194	1,800	Q633 Q736 Q826	188562	\$28.73	1-5/8	10-3/8	4.10	1.50	1.25	.75	.94	3/4
0203661	2,760	Q719 Q709 Q752	188572	29.73	1-3/4	11-1/2	3.90	1.50	1.375	1.25	1.25	7/8
105708K+	2,500	25-5LM 25-66LM	188568	34.86	1-3/4	12-5/16	3.59	1.75	1.375	1.25	1.25	3/4
0205172	4,910	Q803 Q778	188366	48.63	2-1/8	15-7/16	5.44	2.00	1.79	1.375	1.25	7/8
0204664	1,250	Q669	189605	42.53	1-5/8	10	3.39	1.50	1.25	.75	.94	5/8
0203161	3,230	Q670	590030	42.15	2	11	4.56	2.00	1.625	1.375	1.28	7/8
03178551	3,560	Q888	188588	35.53	1-3/4	12	3.81	1.62	1.496	1.25	1.25	7/8
03155411	4,570	Q783	188596	40.69	2	12-15/16	4.44	1.88	1.625	1.25	1.25	7/8
0205470	3,560	Q777	188365	34.94	1-3/4	14	3.97	1.63	1.50	1.25	1.25	7/8
106753A+	3,000	30-66LM	188576	29.92	1-3/4	9-7/8	4.62	1.75	1.50	1.25	1.10	3/4
106169A+	3,500	35-6LM	189600	64.71	2	11	5.22	2.00	1.625	1.25	1.10	3/4
SA-3000	3,500	QD82-13	188598	25.41	2-1/4	9-1/2	4.04	2.25	1.759	1.249	--	1
0205574	5,790	Q821	590034	100.83	2-3/4	17-53/64	5.62	2.50	2.00	1.31	1.25	7/8
0317846	8,000	Q848	590042	191.73	3-5/8	15-1/2	7.50	3.50	2.25	1.625	1.00	1-1/4
03185741	8,000	Q886	590038	109.25	3-1/8	16	6.50	3.00	2.25	1.37	--	7/8
106272B+	4,500	45-8LM	188600	55.52	2-1/4	14	5.37	2.25	1.78	1.25	1.06	3/4
107007A+	6,000	60-8LM	188614	83.61	2-3/4	14	5.50	2.75	2.16	1.62	1.38	1
281316+	8,000	80-8LM	590036	143.42	3	16	6.50	2.75	2.16	1.62	1.38	1
528-0300	9,000	90-8BMB	636488	155.61	3	15-1/2	--	2.88	2.74	1.74	--	1-1/4
531-0312	13,000	130-10BM	636487	180.80	3-1/8	17-3/8	7.10	3.00	2.50	1.75	--	1-1/4
529-0450	19,000	190-10BMB	636489	304.66	4.12	15-3/8	8.40	4.00	3.25	2.63	--	2-5/8
2819000	20,000	Q881	590044	464.60	4-1/2	26-1/2	8.87	4.38	3.54	2.62	--	2

+ French & Hecht Style, Cold Rolled Steel Spindles.

Call for Quantity Discounts

WHEEL REPAIR WASHERS



Date: 2500

Used for repairing and reinforcing wheel studs by welding them over the worn and enlarged holes. Can be used on farm wagons, etc. with 1/2" & 9/16" studs. Heavy gauge steel slightly convex with bevel edge.


Packed 50 in a box.

Part Number	Our Seq. Number	Per 1000
Wheel Repair	0000999	\$631.00

WHEEL REINFORCING RINGS

Date: 2000

Six bolt are 1/4" steel plate, eight bolt, & nine bolt are 5/16" steel plate and holes are chamfered on one side, outer edge is chamfered on opposite side.

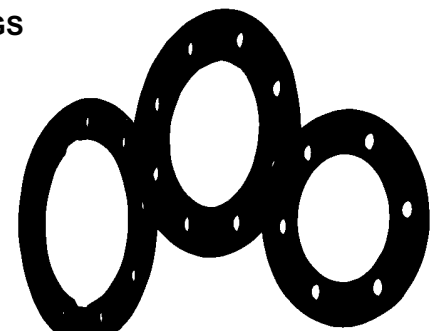

Part Number	No. Of Bolt Holes	Bolt Circle Inches	Pilot Diam Inches	Ring Outside Diameter	Fits Bolt Size Inches	Plate Thickness Inches	Wt. Lbs.	Our Sequence Number	Per Each
60E19	6	x 6	x 4-5/8	8	1/2 & 9/16	1/4	2.5	337805	\$34.34
80E19	8	x 8	x 6	10-1/4	9/16 & 5/8	5/16	4	337810	41.69
81E19	9	x 9-1/2	x 7-3/4	11-3/4	9/16 & 5/8	5/16	5	337815	46.60
91E19	10	x 13-3/16	x 11-1/16	16	7/8	3/8	10	337820	110.37

FOR BOTH FORMED WHEELS & FLAT WHEELS